



CYLINDRICAL STEEL TANKS A & B SERIES



Recommended tightening
torque for Filler Cap: 5 Nm

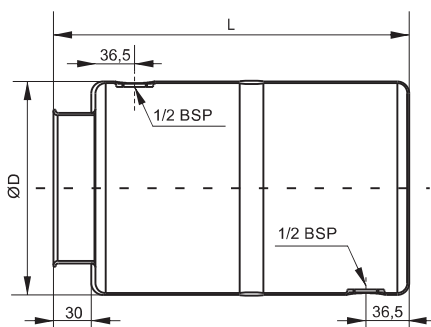

Description	Spare part code	Assembly code	L (mm)	ØD (mm)	Weight	Actual filling volume lt (gal)	
						Horiz.	Vert.
5 l cylindrical horizontal / vertical mounting	E60303006	5B / 5BV	300	180	1,82 Kg	6,3 (1,66)	5,1 (1,35)
10 l cylindrical horizontal / vertical mounting	E60303011	10B / 10BV	262	220	2,01 Kg	8,3 (2,19)	6,3 (1,66)
12 l cylindrical horizontal / vertical mounting	E60303012	12B / 12BV	380	220	2,47 Kg	12,5 (3,30)	10,9 (2,88)
5 l cylindrical horizontal / vertical mounting	S60303006	5BRP / 5BVRP	215	200	2,08 Kg	6,2 (1,64)	5,0 (1,32)

All dimensions are in mm

Material	Fe P04-EN10130 steel sheet 1,5mm thickness, 2,5mm thickness flange
Fluid	Mineral based oil ISO/DIN 6743/4
Working temperature	-15 / +70°C

Notes: the piping kit, standard suction filter, filler/breather and drain plug are included when specifying the tank in PPC assembly code. When ordering spare parts, only the drain plug and filler/breather are included.