



NG6 (CETOP 3) SANDWICH FLOW CONTROL VALVE METER OUT

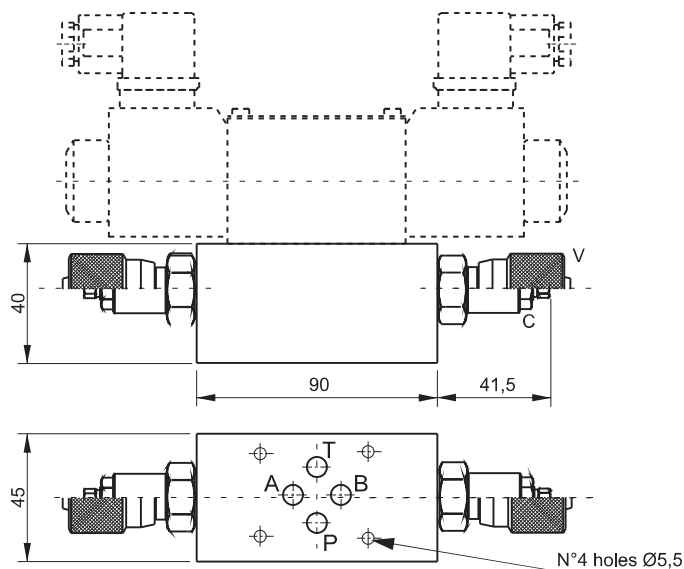

Mounting example



Main features

Max pressure	300 bar
Max flow	15 l/min
Weight	Single valve: 0,52 kg Double valve: 0,64 kg
Fixing bolts	4 M5x° bolts. 5Nm torque 10,9 class steel or above
Fluid temperature	-20 ÷ +80°C
Filtration degree	25 ÷ 50 µ

Spare part code




E6043300** — NG6 (Cetop 3) sandwich meter-out flow control valve

1 — Type:

- 1 = on A and B
- 2 = on A
- 3 = on B

- — Adjusting device:

- = screw (std)
- V = handwheel

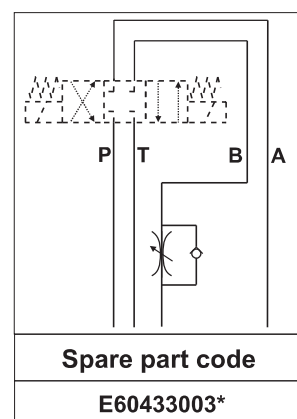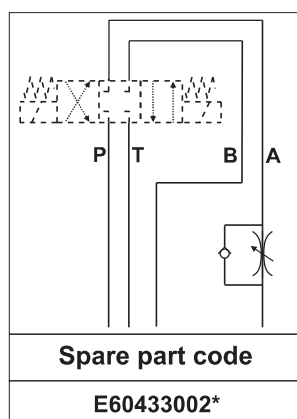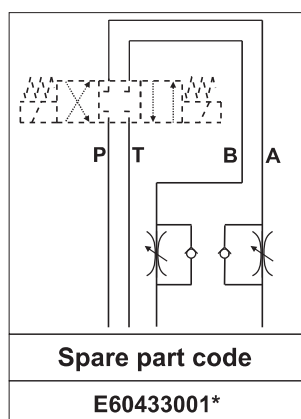

Notes: code does not include the Cetop solenoid valve.

* Bolt length depends on number of modular blocks and type of valve.