
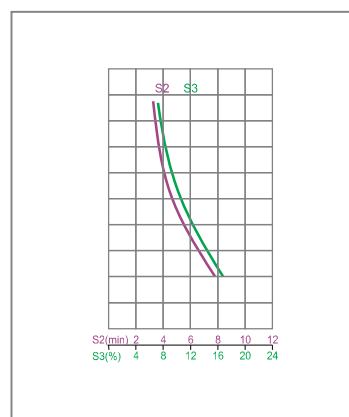


DC MOTORS Ø125 WITH COOLING FAN DIAGRAMS

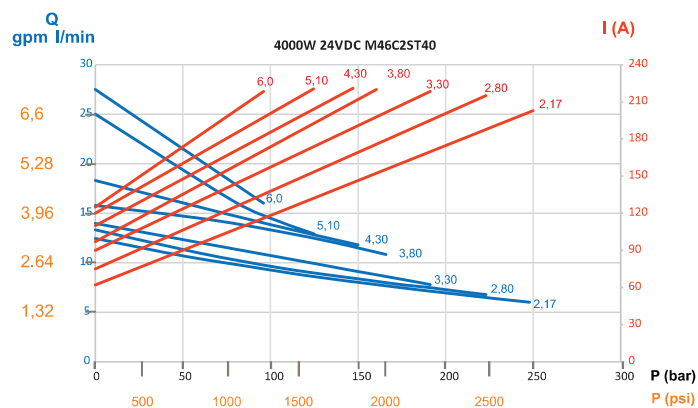

Tests made with rectified current supplied at nominal motor voltage (measured at the motor connection terminals) and oil ISO VG46 at 40°C
Motors with no cooling fan have a lower duty charge S2 and S3 values (about 20% less than above diagrams)