
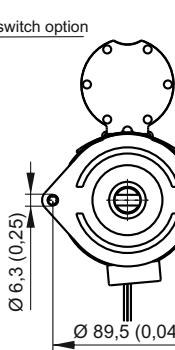
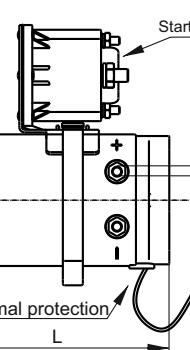
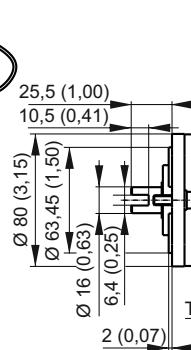



INTEGRAL DC MOTORS Ø80**NEW**

Permanent magnets
Protection degree: IP54



Insulation class: F
Weight 800W: 2,6 kg (without starting switch)
Weight 1200W: 3,7 kg (without starting switch)
UL motors available on request

**Code**

Description	Assembly code	Spare part code	Nominal duty cycle	Nominal speed	Nominal current	L
800W 48V DC + thermal protection	0,8 48DC_T	M46C4ST08	S2: 3 min S3: 10% ED	2900 rpm	26 A	187 mm
1200W 12V DC + thermal protection	1,2 12DC_T	M46C1ST12	S2: 1,5 min S3: 7% ED	3200 rpm	140 A	186 mm
1200W 24V DC + thermal protection	1,2 24DC_T	M46C2ST12	S2: 1,5 min S3: 7% ED	3200 rpm	70 A	186 mm

Options & couplings

Description	Assembly code	Spare part code
12V DC 150 Amp start relay + mounting kit	S150T 12DC 80	M47TC0001+M47SK0801
12V DC 150 Amp start relay + mounting kit + Faston optional connector	S150 T 12DC 80 F	M47TC0001+M47SK0801+2x24556
24V DC 150 Amp start relay + mounting kit	S150T 24DC 80	M47TC0002+M47SK0801
24V DC 150 Amp start relay + mounting kit + Faston optional connector	S150 T 24DC 80 F	M47TC0002+M47SK0801+2x24556
48V DC 150 Amp start relay + mounting kit	S150T 48DC 80	M47TC0004+M47SK0801
48V DC 150 Amp start relay + mounting kit + Faston optional connector	S150 T 48DC 80 F	M47TC0004+M47SK0801+2x24556
12VDC 100 Amp start relay (reversible)	R100 12DC*	M47NB0001
24VDC 100 Amp start relay (reversible)	R100 24DC*	M47NB0002
Coupling for Ø 80 DC motors and gr.0 pump	E36200003 See table page A200	
Wired remote control with 2 buttons and 3m cable	P0201 (single acting)	
Wired remote control with 4 buttons and 3m cable	P0202 (double acting)	

Notes: The starting switch mounting kit is provided when specifying the /S150 as motor option in the PPM assembly code. When ordering spare starting switches, they must be ordered separately (example code: M47SK0801).

The coupling is already included when specifying the motor in the PPM assembly code. It is to be indicated only when ordering PPM with no motor but with a coupling. The reversible start switch cannot be mounted on the motor. It must be fixed on the machine.

For ambient relative humidity over 60%, motors with optional IP67 protection index are available and required. Please ask your sales representative.