

DC MOTOR OPTIONS




Starting relay (reversible) 100A
for reversible motors and pumps

Weight: 0,5kg
Protection degree: IP65
Max current draw: 1A@12VDC - 0,5A@24VDC
Max environment temperature: 40°C
Poles thread: 4 x M6

Nominal current	Peak Current (40ms)	Spare part code
100A	400A	M47NB0001 (12V DC) M47NB0002 (24V DC)



Recommended working position: either horizontal or vertical with poles set upwards.

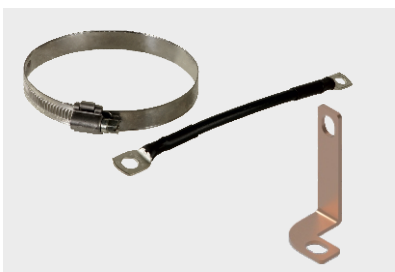

Mounting kit for DC motors

Motor Type	Mounting Kit code	Mounting kit sub-parts	
		Power cable	Fixing system
Ø 80	M47SK0801	M47SK000A	Clamp band E60513080
Ø 114 Rigid	XACNH00001	MACNH00001	2xscrew TCEIM5X10 + 2xwasher WASHL05
Ø 114 Flexible	M47SK1121	M47SK000C	2xscrew TCEIM5X10 + 2xwasher WASHL05
Ø 125 - 151	M47SK1251	M47SK000E	2xscrews TCEIM5X10 + 2xwasher WASHL05

Spare part code
MACNH00001

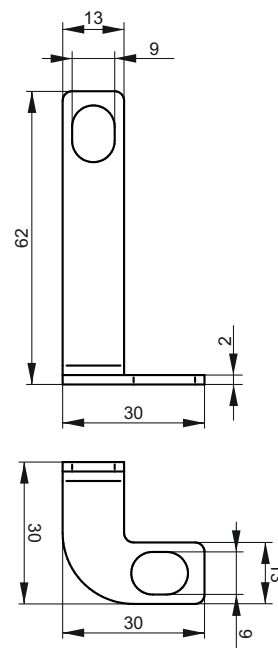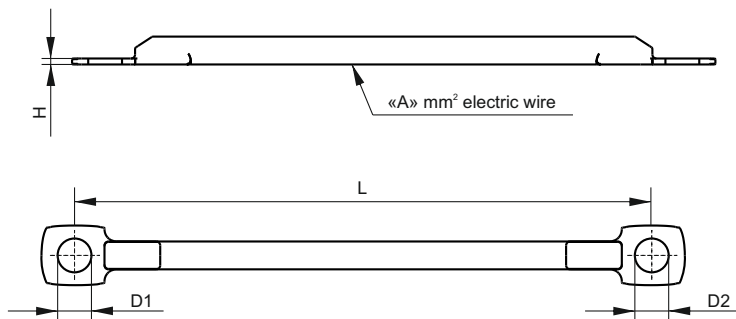

Power Cables

Spare part	L (mm)	A (mm ²)	D1 (mm)	D2 (mm)	H (mm)
M47SK000A	130	10	6	8	1,5
M47SK000C	130	16	8	8	2
M47SK000E	130	25	10	8	2