



MODULAR MANIFOLDS NG6 (CETOP 3), REAR PORTS




Dimensions in mm (inches)

Main features

Max pressure	350 bar
Weight	0,37 Kg (0,82lb)
Fixing bolts	2 M8 tie - rods steel class 8.8 or above

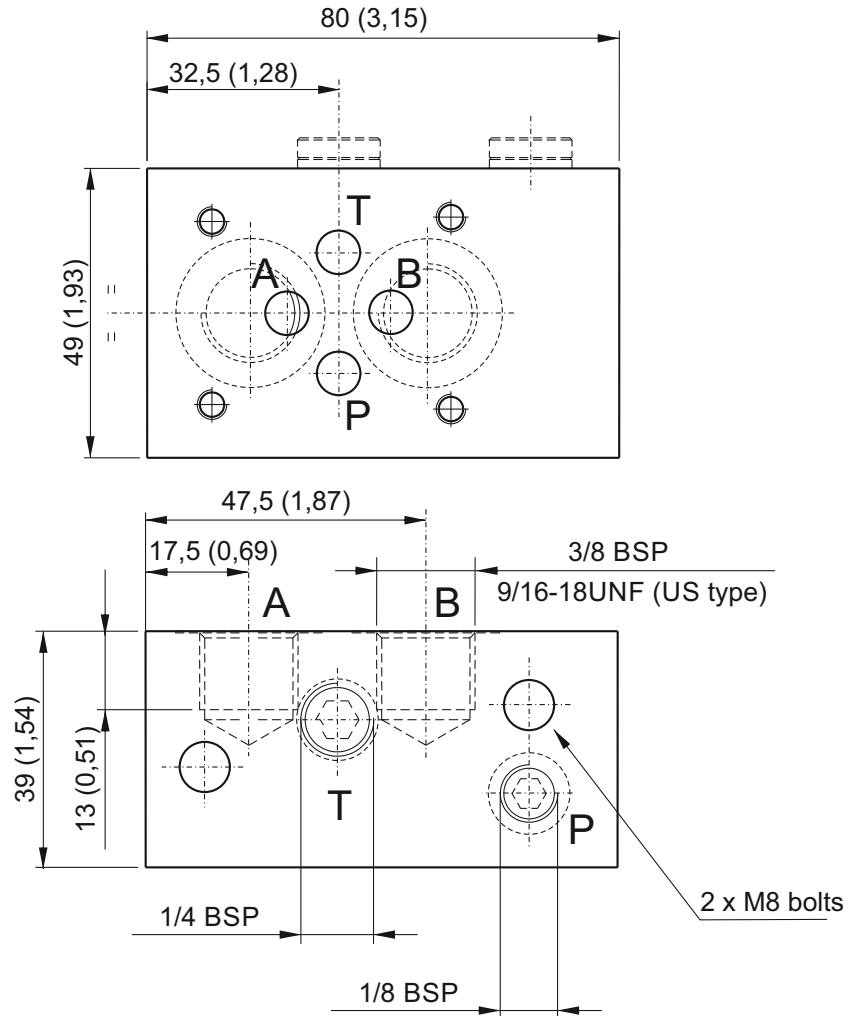

<i>Parallel connection</i>	Spare part code
Rear ports	E60403001
Rear ports US execution	E60403001US

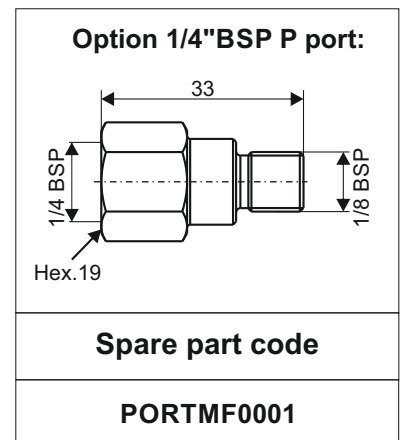

Note: Recommended tightening torque for M8 bolts: 16 Nm. Attention! Do not use tie-rods less than 8.8.

To use blocks with a PPC interface on PPM manifold, the M60403008E block must be used.

*: US execution with 9/16-18UNF SAE06 exit ports

To add external manifolds to a PPM assembly code, just add their spare part codes at the end of the PPM code. eg: PPM-0,8 12DC-MB-J-K0,6-V180-G-RETURN KIT-1,5L+M60403008E+E60403001.

The Cetop attachment is on motor side. Code does not include the Cetop solenoid valve. See NG6 (Cetop 3) valves table in section G.