


NG6 (CETOP 3) DIRECTIONAL SOLENOID VALVES

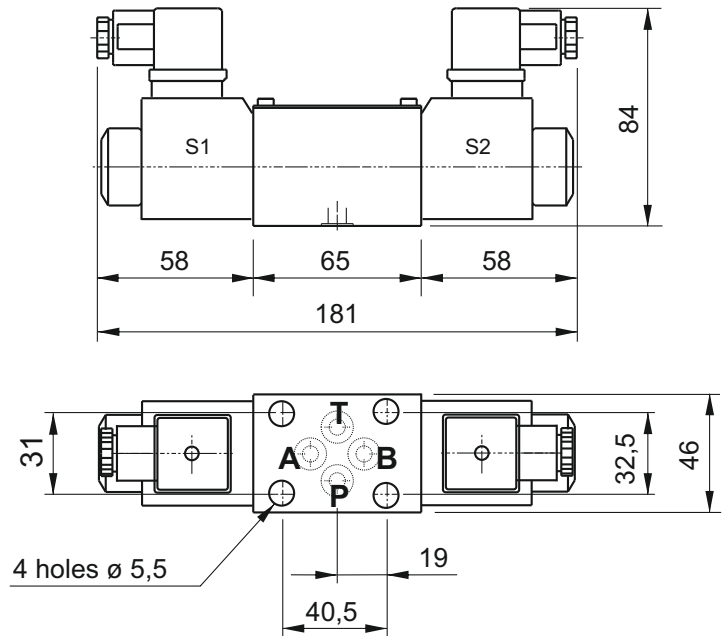

Main features

Max pressure	280 bar
Max pressure on T port	210 bar static, 180 bar dynamic
Max flow	40 l/min
Weight	1,43 kg (2 solenoid) 1,16 kg (1 solenoid)
Internal leakage	0,04 l/min at 200bar
Fixing bolts	4 M5x30 bolts. 5Nm torque 10,9 class steel or above
Coil insulation	Class H
Electric connection	DIN 43650-A / ISO 4400
Protection class	IP 65 / DIN 40050
Duty cycle	ED 100%
Voltage required	+/- 10% nominal voltage
Manual Override	included as standard
Standards	EN50081-1 / EN50082-2 (89/336 CEE electromagnetic comp.) 73/23/CEE / 96/68/CEE (low voltage)

Spare part code

- SD03** — Cetop 3 directional solenoid valve
- A2** — Spool configuration: see table below
- 24DC** — Supply voltage: see coils table section G
- — Options: - = std

Spool

Double solenoid

A2	
B2	
C2	
E2	

Single solenoid

