



# SECTION G



## NG6 (CETOP 3) SANDWICH PRESSURE REDUCING VALVE

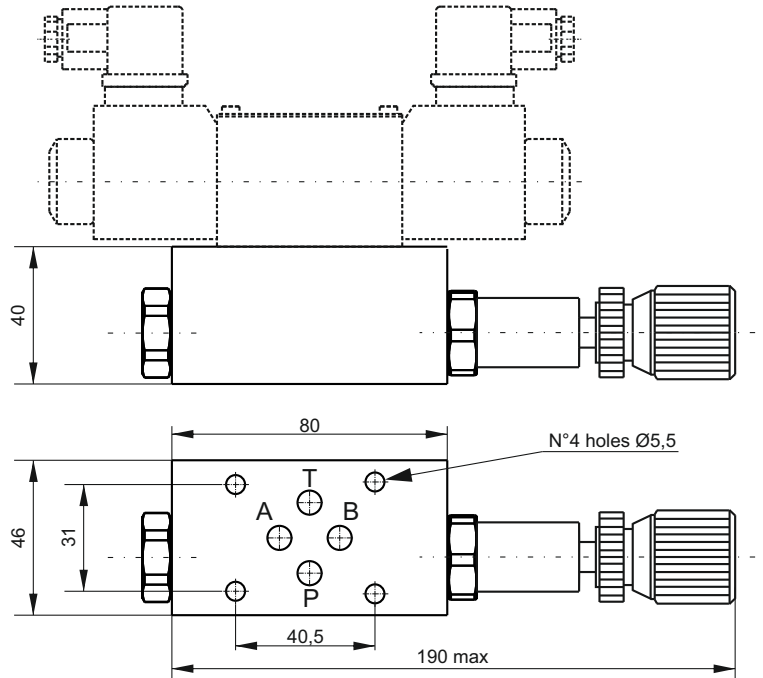

### Mounting example

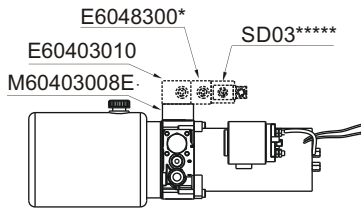

### Main features

Max pressure	210 bar
Max flow	35 l/min
Weight	1,3 kg
Fixing bolts	4 M5x** bolts. 5Nm torque 10,9 class steel or above
Fluid temperature	-20 ÷ +80°C
Filtration	25 ÷ 50 µ

### Spare part code

- E6048300\*** — NG6 (Cetop 3) pressure reducing valve
- 1** — Hydraulic scheme (see below):  
1: reducing on P  
2: reducing on A  
3: reducing on B
- B** — Spring range:  
B: 7-70 bar  
D: 70-210 bar

